


Instruction: LD R, R'

Description: Load the contents of register R' into register R

EXAMPLE: LD B, C

REGISTERS

A			C
B	8	8	E
D			L
H			

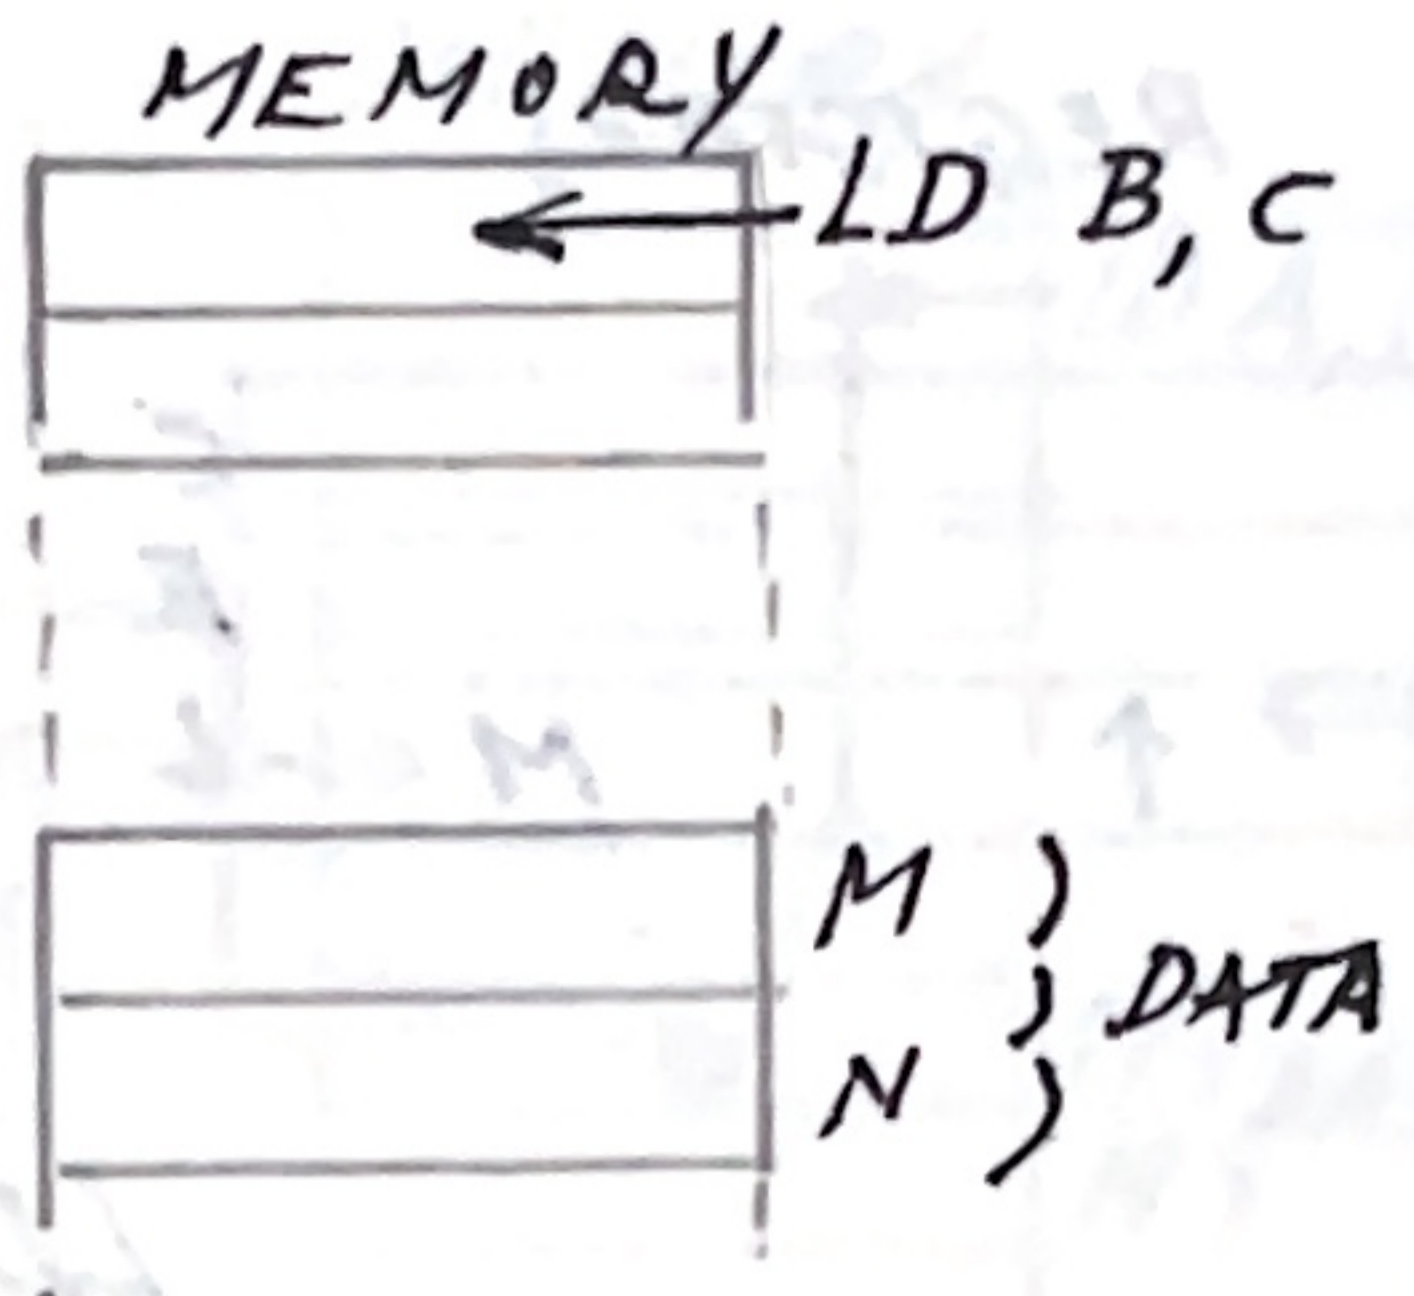


INSTRUCTION: LD A, (nn)

DESCRIPTION: LOAD register A with the contents of location nn in RAM

EXAMPLE LD A, (M)

REGISTERS

A	5		C
B			E
D			L
H			

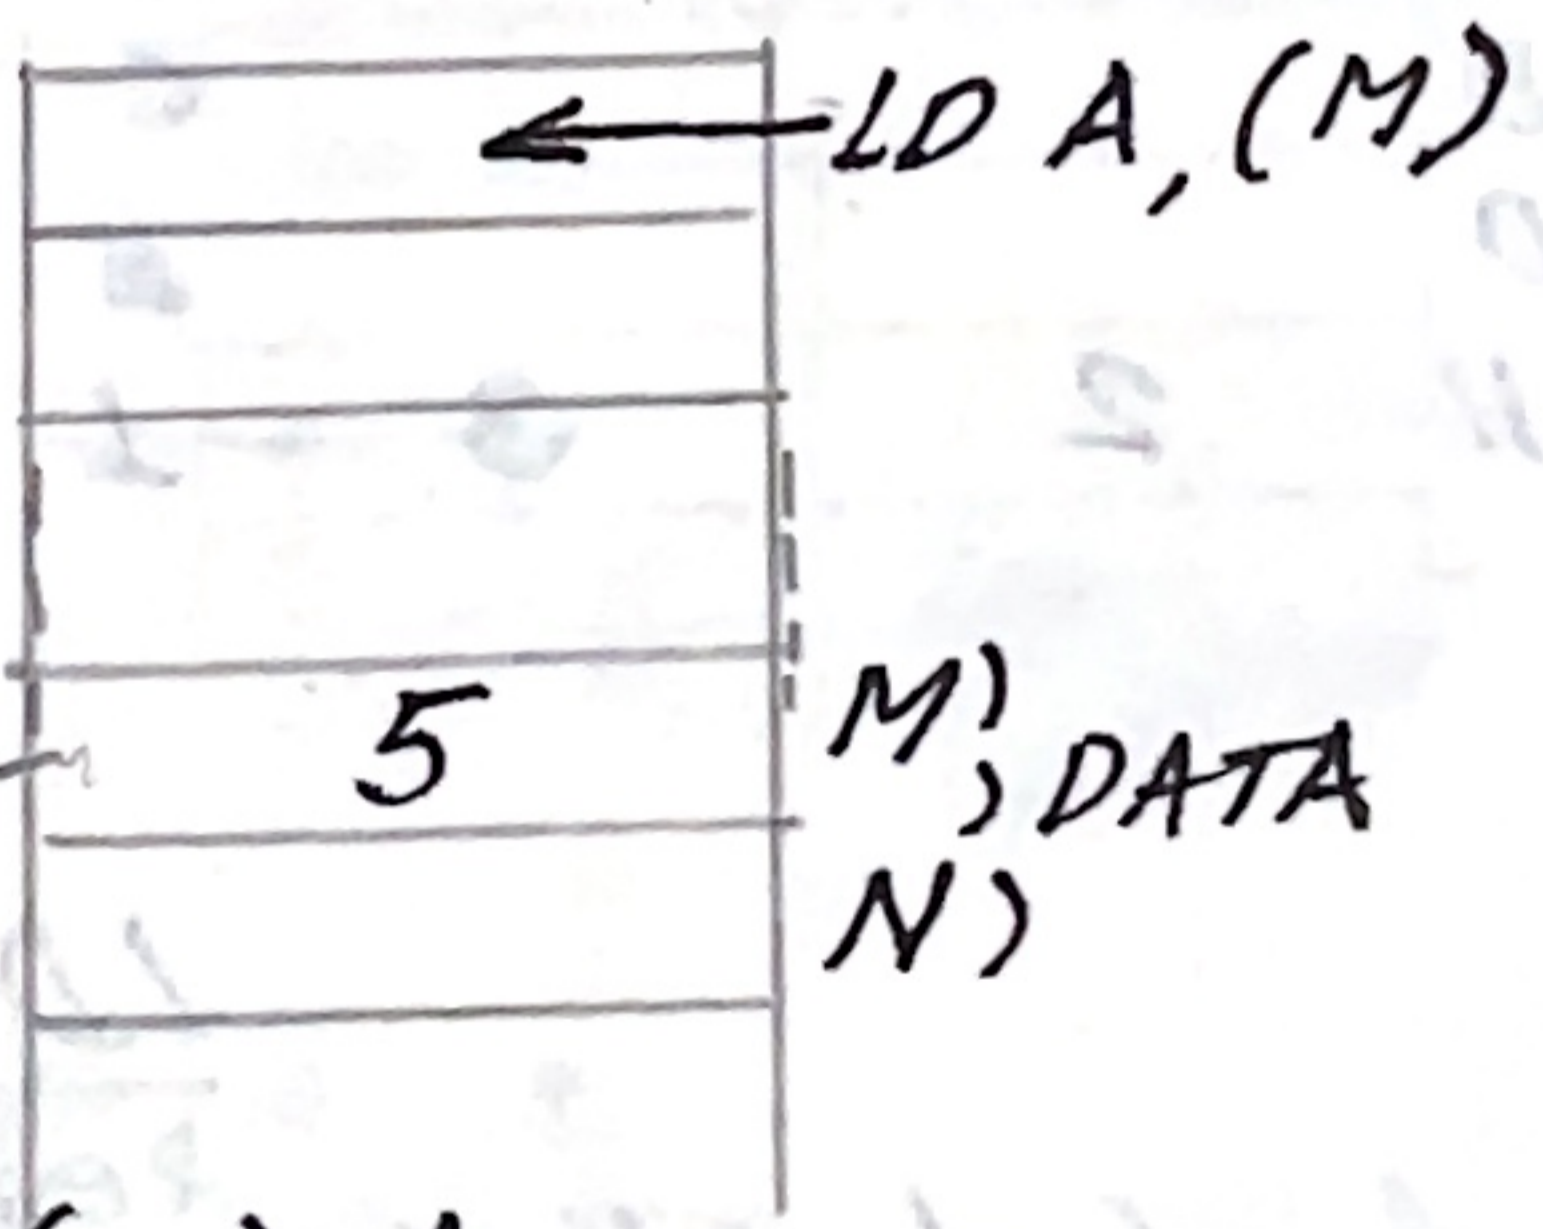

INSTRUCTION: LD (nn), A

DESCRIPTION: LOAD the contents of register A into the location with address nn

EXAMPLE: LD (M), A

REGISTERS

A	5		C
B			E
D			L
H			

