


LD HL, nn

LOAD the Literal nn (usually an address) into registers H & L


EXAMPLE: LD HL, ↑M

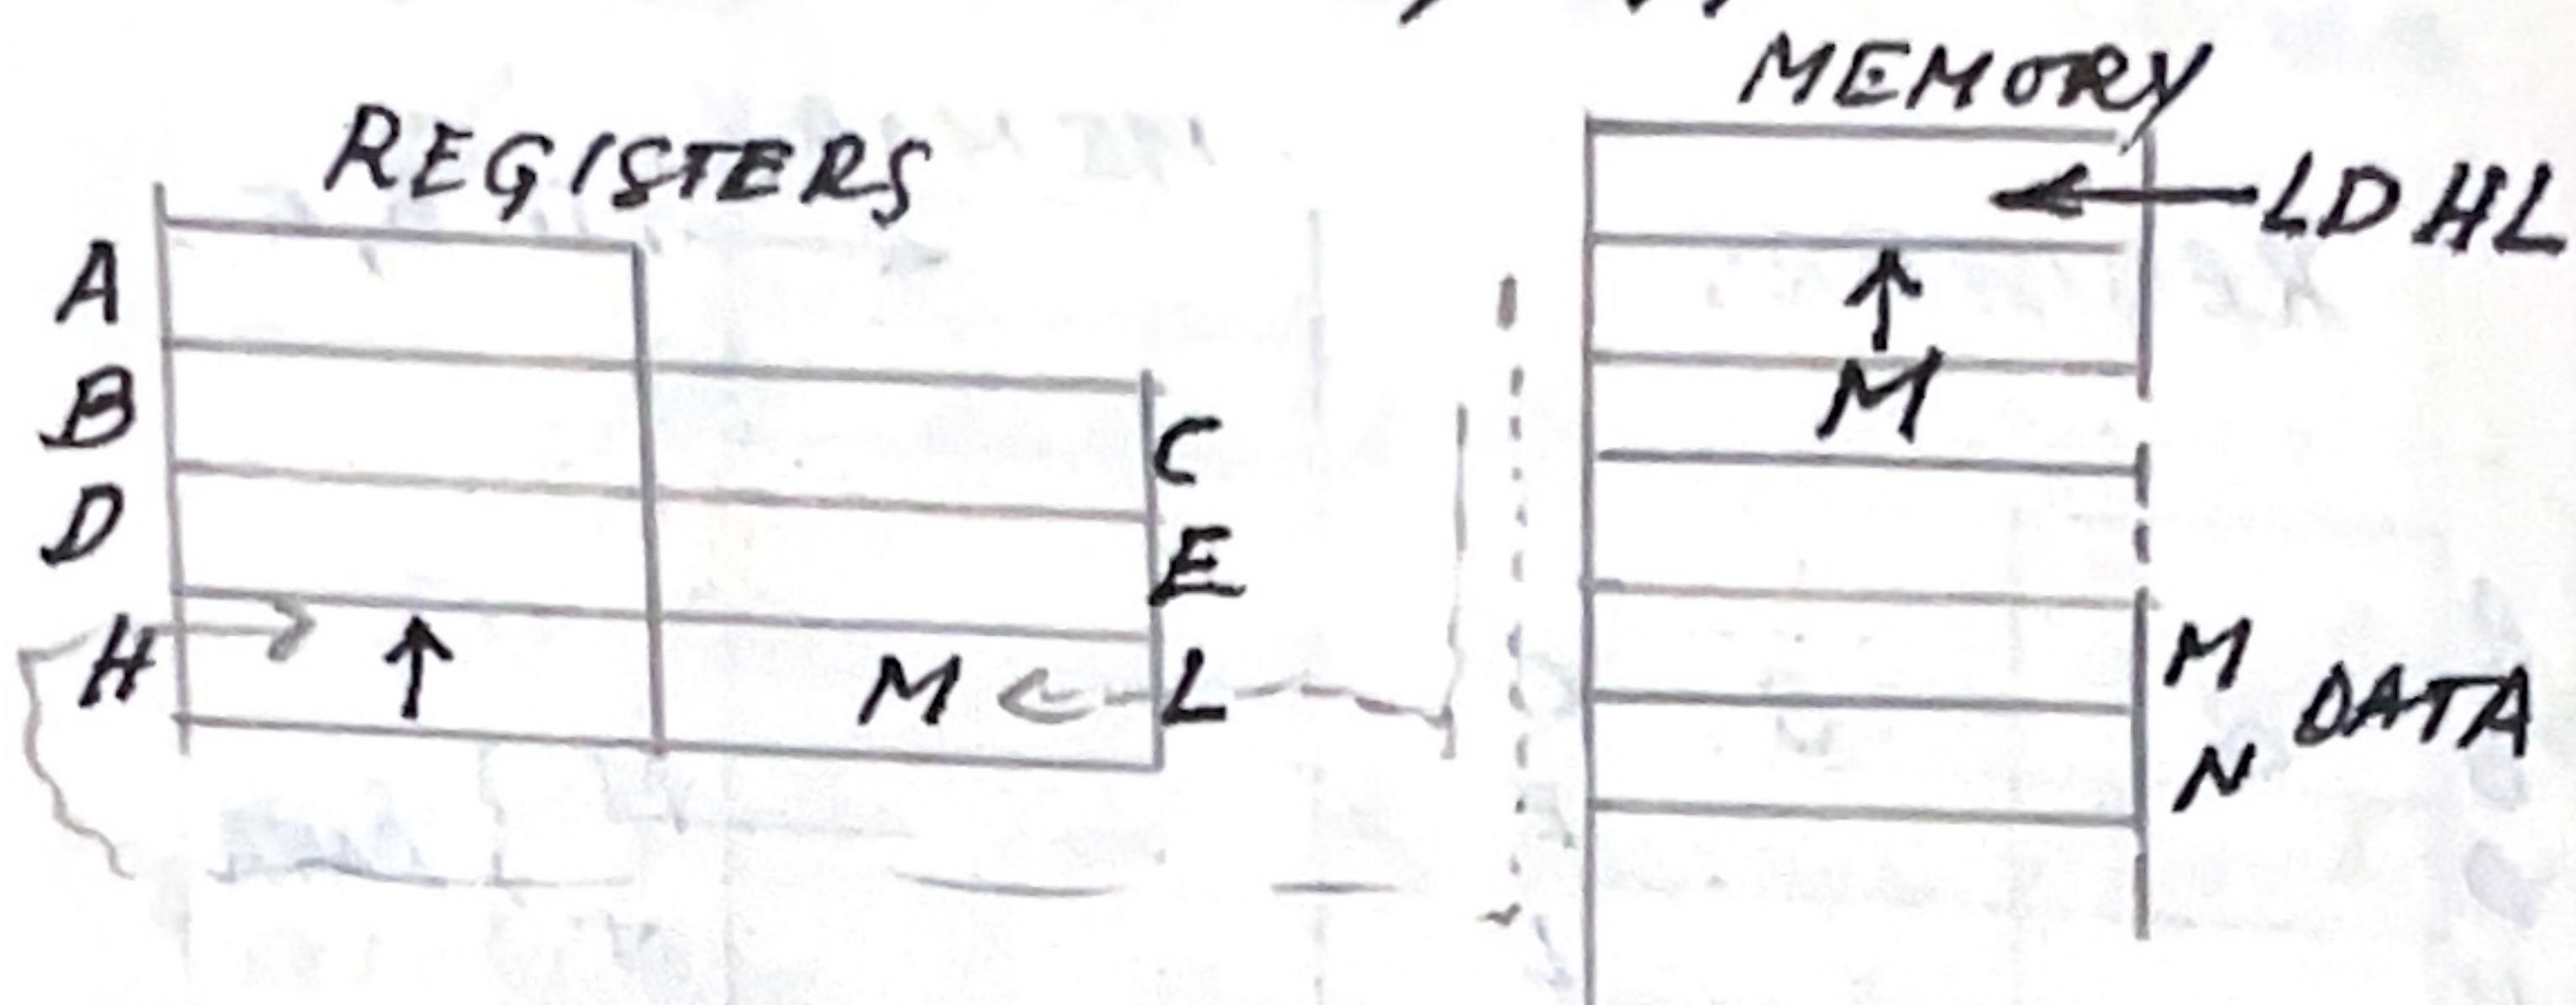

LD(nn), HL

Load the contents of registers H & L (sometimes an address) into store location nn & $nn+1$.

EXAMPLE: LD (M), HL

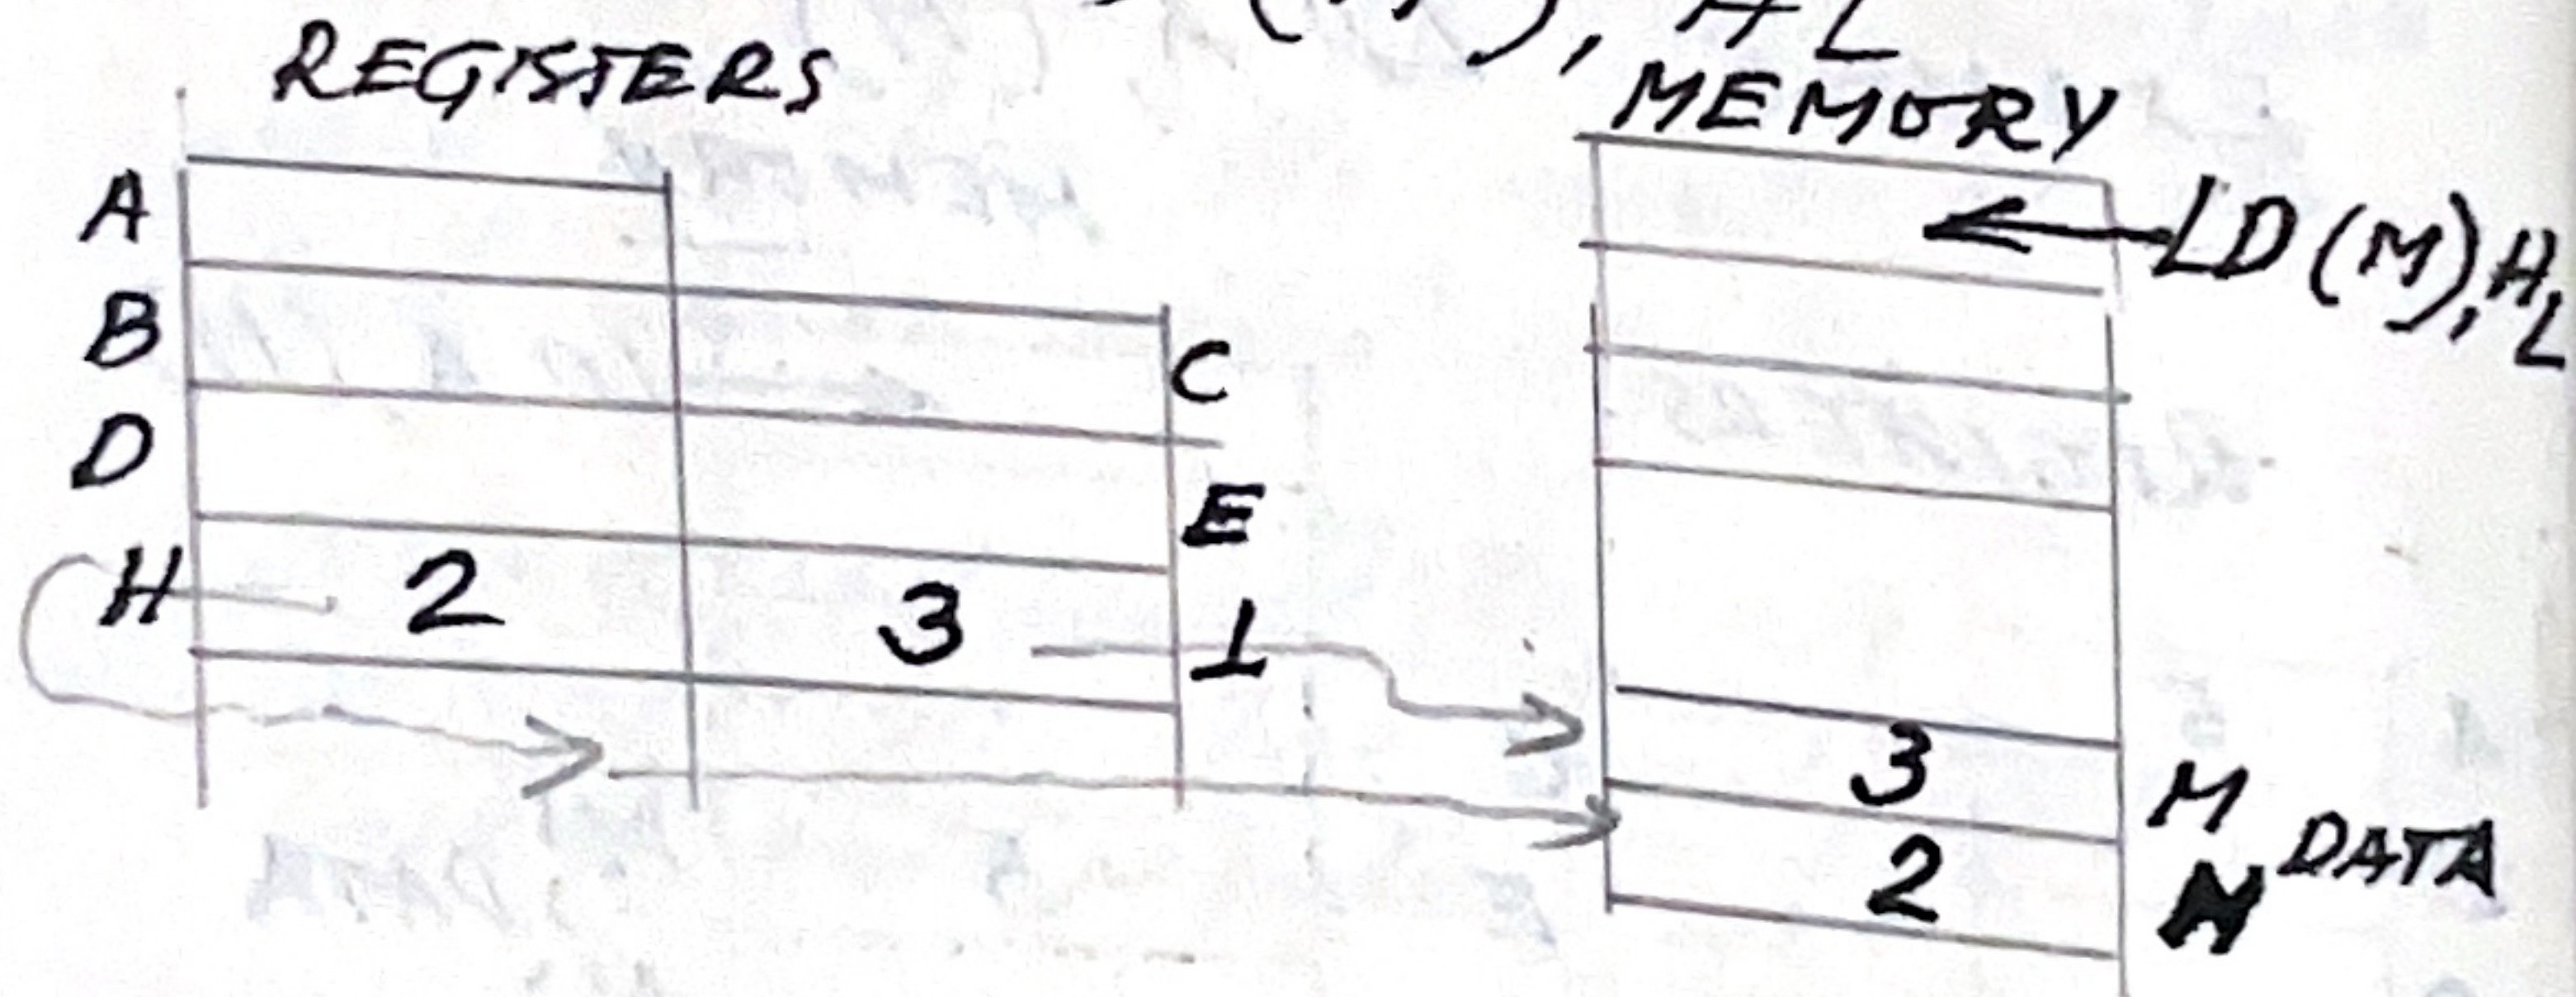

LD HL, (nn)

Registers L & H are loaded with the values in store locations nn and $nn+1$

EXAMPLE: LD HL, (M)

