


## LD A, (HL)

Load register A from the store location whose address is in HL


EXAMPLE: LD A, (HL)

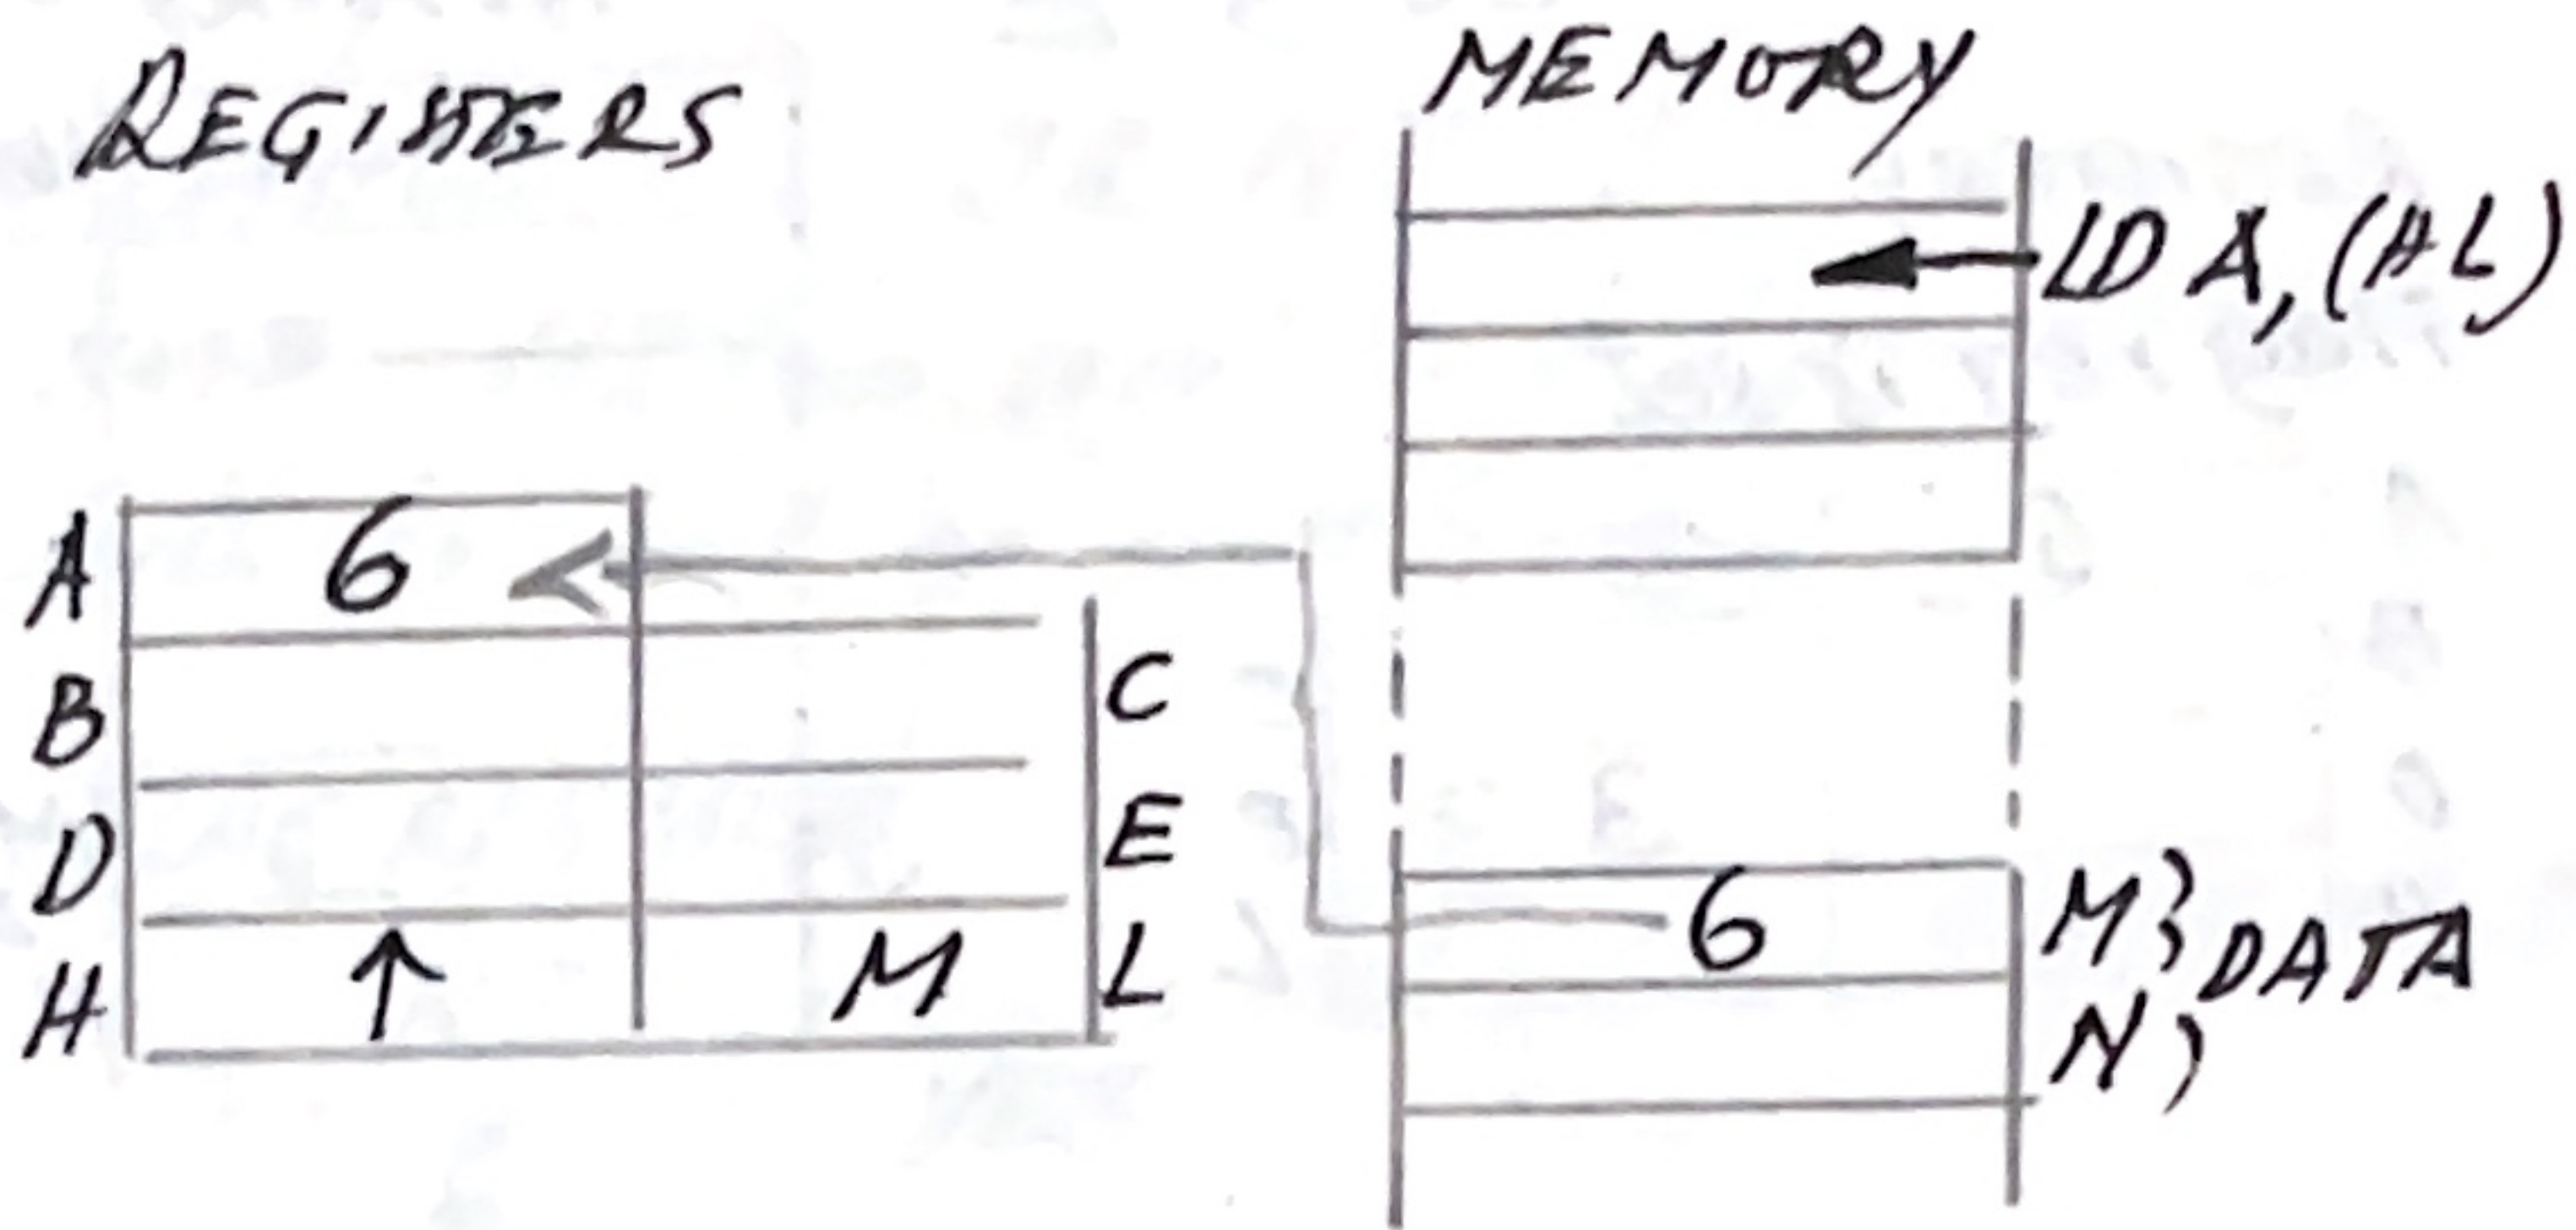

## LD (HL), A

Load the value held in A into the address held in register HL

EXAMPLE: LD (HL), A

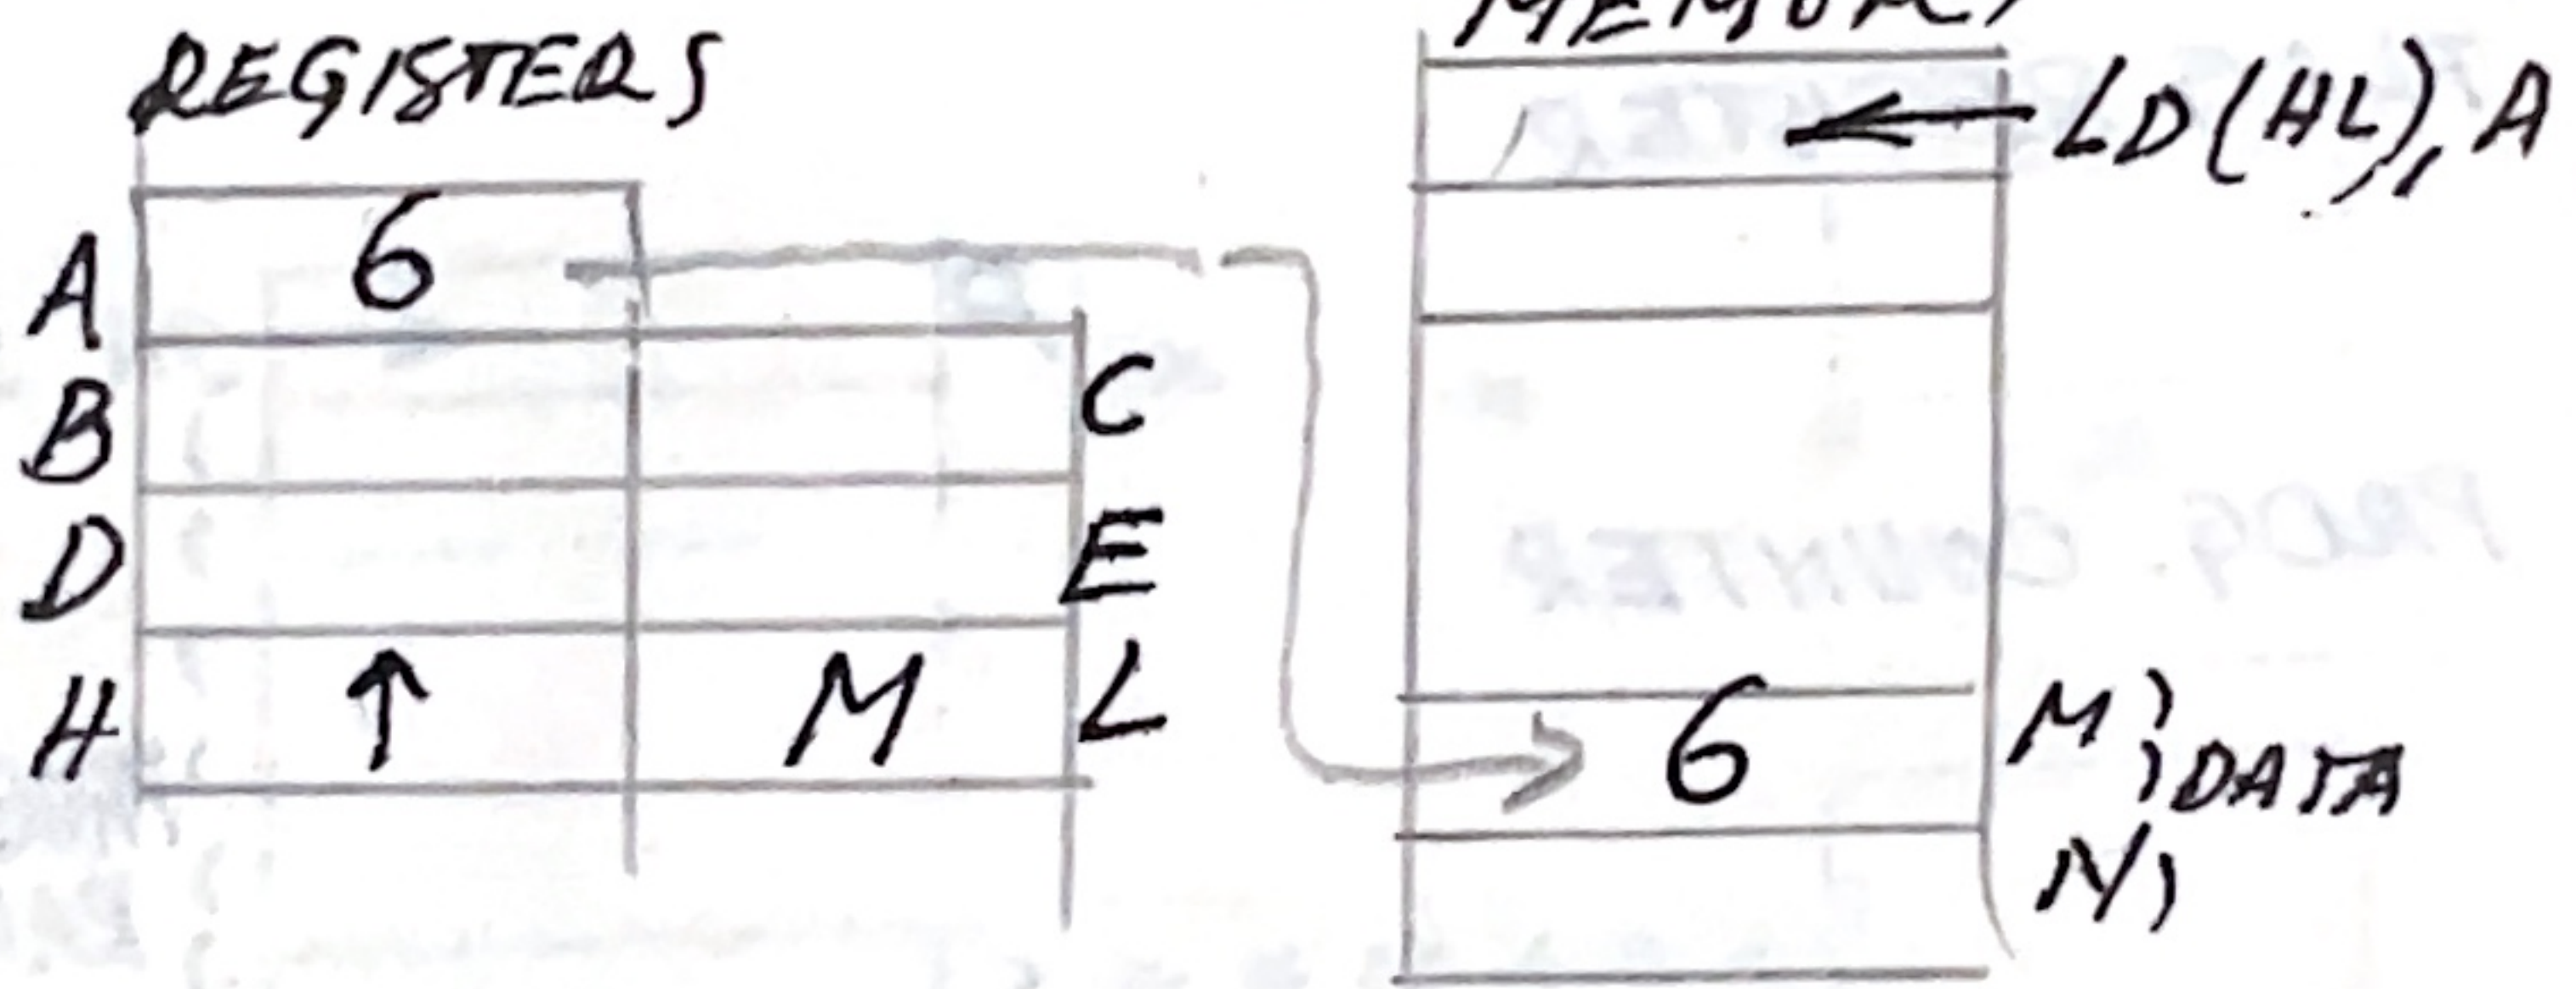

## ADD A, r

ADD the contents of the register operands together and place the sum back into register A

EXAMPLE: ADD A, E

FLAG reg. is set

