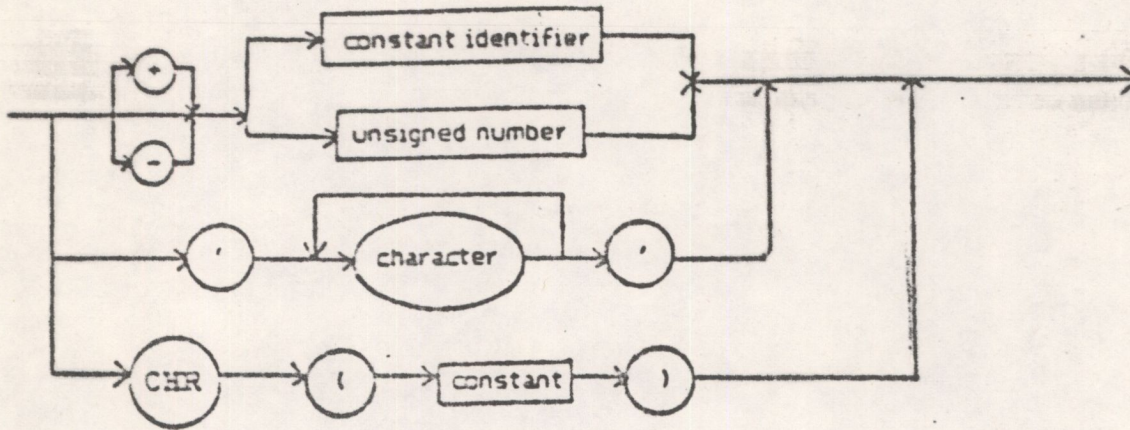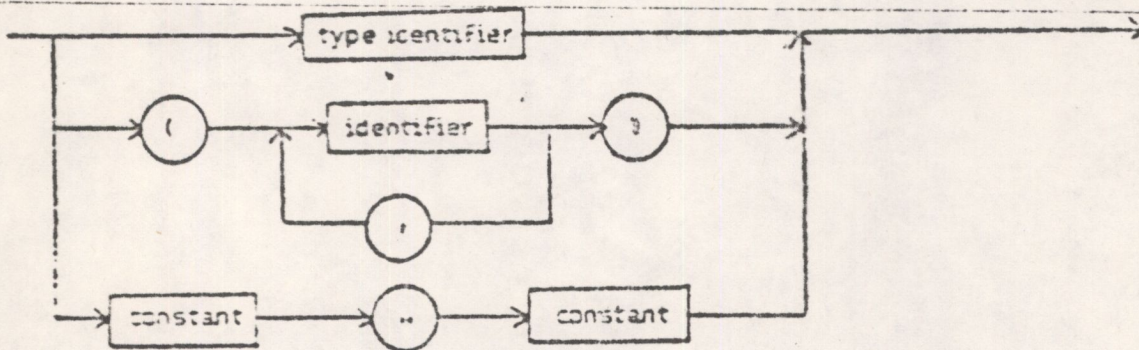## 1.5 CONSTANT.

The non-standard CHR construct is provided here so that constants
may be used for control characters. In this case the constant
in parentheses must be of type integer.

E.g. CONST bs=CHR(10);
      cr=CHR(13);

1.6 SIMPLE TYPE.

Scalar enumerated types (identifier, identifier, ...) may not have more than 256 elements.